




NARCAR 390 UVR WATERPROOF

INFORMATIVE
DATA-SHEET

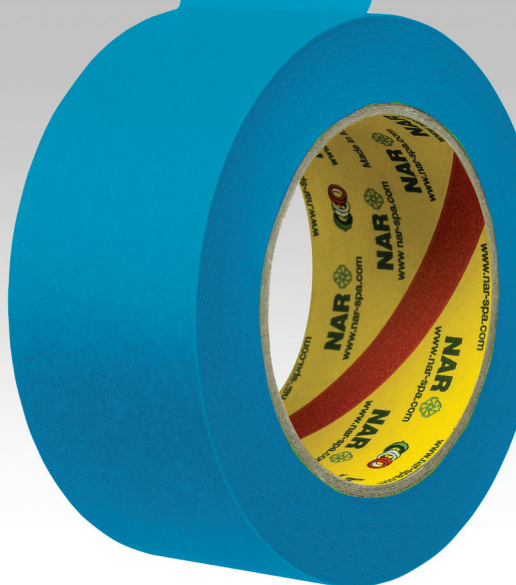

UV RESISTANT



RESIDUAL FREE REMOVAL

MADE IN ITALY

AUTOMOTIVE MASKING TAPE

COMPOSITION

BACKING: lightly crepe paper waterproof
ADHESIVE: natural rubber / hydrocarbonic resins / solvent
CORE: recycled paper and paperboard

SUITABLE FOR

Automotive aftermarket, collision repair, medium/high temperature car bodywork, nautical sector and wet sanding. Removable without residue within 10 days of outdoor application.

AVAILABLE COLOURS

Blue

The product is ideal for surfaces exposed to the elements thanks to the UV resistance up to 10 days. The special waterproof treatment increases the tape's performances for the most challenging applications.



WATERPROOF



HIGH VISIBILITY



HEAT RESISTANCE
80°C for 90 min.
110°C for 30 min.



NAR S.P.A.
Legnaro (PADOVA)
ITALY
www.nar-spa.com

Membro di:



LEGNARO - BRUGINE - SCHIO



LEGNARO



LEGNARO



AUTOMOTIVE MASKING TAPE



INFORMATIVE DATA-SHEET

									
	backing thickness	total thickness	adhesion N/cm	breaking load N/cm	elongation %	temperature resistance	colour	waterproof	uv resistance
NARCAR 350	58 g/m ²	135 µm	> 2,6 N/cm	> 32 N/cm	> 8 %	80°C/90min 100°C/60min 110°C/30min	● ○ ●		
NARCAR 355	60 g/m ²	140 µm	> 2,6 N/cm	> 33 N/cm	> 8 %	80°C/90min 100°C/60min 110°C/30min	● ●		
NARCAR 355 WP	60 g/m ²	140 µm	> 2,6 N/cm	> 33 N/cm	> 8 %	80°C/90min 100°C/60min 110°C/30min	●	●	
NARCAR 390 UVR-WP	76 g/m ²	150 µm	> 2,6 N/cm	> 35 N/cm	> 8 %	80°C/90min 100°C/60min 110°C/30min	●	●	●

● brown ○ white ● yellow ● yellow fluo ● orange ● green ● blue

It is good practice to use the product within 12 months from purchase date (6 months if jumbo roll). The rolls must be kept in their original packing. Keep the product out of the light and protect from direct heat sources. The tape must be kept in a dry place, at humidity level below 65%, preferably at a temperature between 15° C and 25° C. If the storage temperature is different, restore the tape back to above level before using it. The values in the informative data sheets are the average results of tests made on our standard production and are not legally binding. The aesthetic and technical features may be subject to some changes caused by ageing, even though the quality level of the product is maintained. Nar shall not be liable for direct damages or for any consequence arising from the misuse of the product. We suggest the verification of the product suitability to the specific condition of use. Additional indications are available in the last edition of the booklet "Recommendation regarding choice, storing and use of pressure sensitive tapes" published by Federazione Gomma Plastica.



[www.nar-spa.com/
note-tecniche.html](http://www.nar-spa.com/note-tecniche.html)